

## Настольные источники питания

AD MT, AD KW, AD IC, AD TA, AD VS, AD MX,  
AD NK, AD HYT, AD SP, AD SIP, AD UN

Архангельск (8182)63-90-72  
Астана (7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Казань (843)206-01-48

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81


Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54

Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

# AD SERIES DESKTOP POWER SUPPLIES

## DESKTOP POWER SUPPLIES

The desktop power supplies, popularly called the "wedge" due to its distinctive, ergonomically friendly shape, offer a convenient way to convert 12Vdc mobile radio transceivers for use as desktop base stations. They will operate from AC supplies, either 115V or 230V without manual adjustment and output up to 108W (9Amps).



- We started making these for Motorola radios 12 years ago, now we have 24 varieties for 9 manufacturers.
- The desktop units are supplied with endplates configured to fit with your radio - see complete list.
- For a complete system, order our fully compatible battery back up box - P/N AD BBB (to include a 7Ah battery) or AD BBB NB (excluding the battery).

Radio Transceiver + Alfatronix Desktop Power Supply + Alfatronix Battery Back Up Box

## BATTERY BACK UP BOX

The AD Series Desktop Power Supplies include a battery back up output as standard. This can be connected to maintain charge in a lead acid battery to supply power in the event of a mains failure. As a neat alternative to a loose battery, Alfatronix also supply a battery back up box, P/N AD BBB. This is designed to fit underneath the desktop supply and radio assembly and includes a 7Ah lead acid gel battery, presenting all three components as one tidy desktop assembly.

The battery back up box also includes a speaker (mounted on the front of the unit) for those wishing to use hands free radio operation.

## CAN'T FIND WHAT YOU'RE LOOKING FOR?

Alfatronix Desktop "wedge" power supplies are configured to suit a wide range of radio transceivers from many manufacturers. However, if you use a variety of radio not listed, or cannot find

a compatible unit, try our UNIVERSAL unit (P/N AD UN UNI). This uses a mechanical interlocking fixing system (3M "Dual Lock") to fix the transceiver securely to the power supply.


## PRODUCT CODING

The product codes are developed to be as intuitive as possible. Taking the Motorola AD MT CM as an example:

<b>AD</b>	AC input & DC output
<b>MT</b>	Denotes the radio manufacturer, in this case Motorola
<b>CM</b>	Denotes a popular radio compatible with this unit

Please note: Like most part numbers, the CM fits a *range* of radios, not just the CM.

## BATTERY CHARGING CURVE

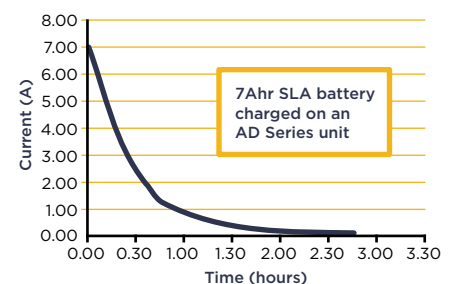

# TECHNICAL DATA

Input voltage range	Auto-select, 85-135Vac and 170-265Vac, 50Hz/60Hz								
Output voltage & current	13.6Vdc. Worst case limits are +/- 4% 108W (9A)								
Output Noise	<50mV pk-pk at continuous load								
Power Conversion Efficiency	Typically 83%								
Isolation between input and case/output	1.5kVac/3.0kVac rms								
Isolation between casework to ground	Connected directly to mains input ground								
Normal operating temperature	-25°C to +30°C to meet this specification table +30°C to +70°C de rate linearly to OA								
Storage temperature	-25°C to +100°C								
Max case temperature	70°C at full load with 25°C ambient								
Operating humidity	95% max, non-condensing								
Casework	Anodized aluminum, glass-filled polycarbonate								
Connections:	<table border="0"> <tr> <td>Input</td> <td>IEC-320 C14 socket, C13 terminated cordset</td> </tr> <tr> <td>Output</td> <td>6.3mm push-on blade terminals</td> </tr> <tr> <td>Ground</td> <td>6.3mm push-on blade terminals, adjacent to output (additional external ground if required)</td> </tr> </table>	Input	IEC-320 C14 socket, C13 terminated cordset	Output	6.3mm push-on blade terminals	Ground	6.3mm push-on blade terminals, adjacent to output (additional external ground if required)		
Input	IEC-320 C14 socket, C13 terminated cordset								
Output	6.3mm push-on blade terminals								
Ground	6.3mm push-on blade terminals, adjacent to output (additional external ground if required)								
Output indicator	Green LED mains output on Orange LED battery back up mode								
Mounting method	By rubber feet on base and direct attachment to radio above.								
Safe area protection:	<table border="0"> <tr> <td>Over current</td> <td>Limited by current sensing circuit</td> </tr> <tr> <td>Over heat</td> <td>Limited by temperature sensing circuit</td> </tr> <tr> <td>Transients</td> <td>Protected by filters and rugged component selection</td> </tr> <tr> <td>Catastrophic protection</td> <td>Protected by internal input and output fuses</td> </tr> </table>	Over current	Limited by current sensing circuit	Over heat	Limited by temperature sensing circuit	Transients	Protected by filters and rugged component selection	Catastrophic protection	Protected by internal input and output fuses
Over current	Limited by current sensing circuit								
Over heat	Limited by temperature sensing circuit								
Transients	Protected by filters and rugged component selection								
Catastrophic protection	Protected by internal input and output fuses								
Approvals	2014/30/EU The general EMC directive 2014/35/EU The low voltage directive 93/68/EEC The CE marking directive								
Designed to	EN60950, EN55022, EN61204-3								
Markings	CE								

	Weights and Dimensions			
	Width	Depth	Height	Weight
AD UN UNI	168mm	125mm	58mm	800g
AD BBB	163mm	145mm	70mm	2810g
AD BBB NB	163mm	145mm	70mm	318g

**Note:** The general body of all wedges measure as above. The endplates protrude further to allow fixing to the radio.

**Technical Note:** AD BBB contains SLA Battery 12V 7Ahr, both AD BBB and AD BBB NB contain Speaker 8 OHM 3W



# AD SERIES

## DESKTOP POWER SUPPLIES

### FULL PRODUCT LIST

Brand	Alfatronix Part Number	Model	Width (mm)	Height (mm)	Depth (mm)		
Motorola	AD MT-3100/DM	MTM5400 Tetra	170	49	155		
		MTM800 Tetra	170	49	155		
		PRO3100	177	56	176		
		PRO5100	168	48			
		PRO7100	168	48			
		GM340	168	48	187		
		GM640	168	48	187		
		GM350	168	48	183		
		GM360	168	48	183		
		GM660	168	48	199		
		GM380	168	48	199		
		DM 1400/DM 1600	169	44	134		
		DM2600	169	44	134		
		DM 3400/DM 3401	175	51	206		
		DM 3600/DM 3601	175	51	206		
		DM 4400/DM 4401	175	51	206		
		DM 4600/DM 4601	175	51	206		
		Motorola	AD MT-CM	CM-140	169	44	118
CM-160	169			44	118		
CM-340	169			44	118		
CM-360	169			44	118		
Kenwood	AD KW TK-762	TK-760	140	40	145		
		TK-860	140	40	145		
		TK-762	140	40	145		
		TK-780	140	40	145		
		TK-880	140	40	145		
		TK-980	140	40	145		
		TK-981	140	45	145		
Kenwood	AD KW TK-7102H	NX-700/800	160	45	157		
		TK-7302/8302	160	43	137		
		TK-7180	160	45	157		
		TK-7189E	160	45	157		
		TK-8180	160	45	157		
		TK-8189E	160	45	157		
		TK-7360/8360	160	43	160		
Kenwood	AD KW TK-7160	TK-7160	160	43	107		
		TK-7162	160	43	107		
		TK-8160	160	43	107		
		TK-8162	160	43	107		
		TK-7102	160	43	107		
		TK-8102	160	43	107		
Icom	AD IC IC-F310	IC-F310s	140	40	170		
		IC-F410s	140	40	170		
		IC-F310	140	40	170		
		IC-F410	140	40	170		
		IC-F510	140	40	170		
		IC-F610	140	40	170		
		IC-F320s	140	40	170		
		IC-F420s	140	40	170		
		IC-F320	140	40	170		
		IC-F420	140	40	170		
		IC-F520	140	40	170		
		Icom	AD IC IC-F1700	IC-F1710	175	45	170
				IC-F2710	175	45	170
IC-F1810	175			45	170		
IC-F2810	175			45	170		
Icom	AD IC IC-F1010	IC-F1010	150	50	180		
		IC-F2010	150	50	180		
		IC-F1020	150	50	180		
		IC-F2020	150	50	180		
		IC-F1610	150	50	180		
		IC-F2610	150	50	180		
		IC-A110 Euro	150	50	180		
Icom	AD IC IC-F110	IC-F110	150	40	117.5		
		IC-F110S	150	40	117.5		
		IC-F210	150	40	117.5		
		IC-F210S	150	40	117.5		
		IC-F5022	150	40	117.5		
		IC-F6022	150	40	117.5		
		IC-F121/IC-F121S	150	40	167.5		
		IC-F221/ICF221S	150	40	167.5		
		IC-F111/IC-F111S	150	40	167.5		
		IC-F211/IC-F211S	150	40	167.5		
		IC-F5122	150	40	167.5		
		IC-F6122	150	40	167.5		
		IC-F5012	150	40	167.5		
		IC-F6012	150	40	167.5		
		Icom	AD IC IC-F5062	IC-F5062	160	45	150
IC-F6062	160			45	150		
Tait	AD TA-8000	TM8105	160	50	175		
		TM8110	160	50	175		
		TM8105	160	50	175		
		TM8250	160	50	175		
		TM8255	160	50	175		
		TM9300	160	50	175		
		TM9400	160	50	175		

Brand	Alfatronix Part Number	Model	Width (mm)	Height (mm)	Depth (mm)
Yaesu/Vertex	AD VS VX-2200	VX2200E/2100E	165	46	155
Yaesu/Vertex	AD VS VX-4500	VX-4500/4600 EVX-5300/5400/5600	165 165	45 45	155 155
Yaesu/Vertex	AD VS FP-2500	VX-2000V VX-2000U FP-2500E	160 160 160	40 40 40	105 105 110
Yaesu/Vertex	AD VS VX-4104	VS-4104-0-50 VX4100E VX4200E	165 165 165	43 43 43	155 155 155
Maxon	AD MX PM160	PM100 PM160	174 174	58 58	167 167
Nokia EADS	AD NK EA-TMR880	TMR880	190	58	130
Nokia EADS	AD NK EA-TMR880i	TMR880i TMR880i remote head	182 190	60 72	125 36
Novel	AD NR-M400	NM-60-100 NM-60-400	225 225	47 47	180 180
Hytera	AD HYT 600	TM 600 TM 610	152 152	43 43	125 125
Hytera	AD HYT 785	MD 785	170	60	180
Hytera	AD HYT 680	MT 680	180	60	180
Hytera	AD HYT MD655	MD652/MD652G MD655/MD655G	165 165	46 46	140 140
Sepura	AD SP 8000	SBM800/SCM8000/SEM8000	177	60	184
Simoco	AD SIM SDM 700	SDM 700	170	60	120
Universal	AD UN UNI	Clearstone Hytera TM 800 Simoco Sepura			

The Alfatronix range of Desktop Power Supplies provide bespoke solutions for radios from a wide range of manufacturers. For any not listed the *AD UNI* version can be used with any radio.



## По вопросам продажи и поддержки обращайтесь:

Архангельск (8182)63-90-72  
Астана (7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Казань (843)206-01-48

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54

Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

Единый адрес для всех регионов: [axt@nt-rt.ru](mailto:axt@nt-rt.ru) || [www.alfatronix.nt-rt.ru](http://www.alfatronix.nt-rt.ru)

Power conversion and battery management products for communications, marine and automotive applications

Produits de conversion d'énergie et de gestion de batterie pour les applications des secteurs communications, marine et automotive

Spannungswandler und Batterie-Management Produkte für Kommunikations-, Marine- und Fahrzeuganwendungen

Productos de conversión de energía y gestión de baterías para aplicaciones en los campos de la comunicación, marítimo y de la automoción

